

DATAVENT

GORDON[®]
ARCHITECTURAL + ENGINEERED SOLUTIONS

DATA CENTER CEILING PANELS FOR DG GRIDS


DataVENT is a lay-in panel that is fabricated from non-combustible aluminum. Panels are rigid with high structural integrity.

Applications:

- Hot air return ceiling panel
- Security ceiling panel when used with security hold down clips
- Meets NFPA standards when sprinklers are above the suspension

Attributes:

- Cell size 1/2" x 1/2". Panel height = 1/2".
- 92% open area
- Nominal 24" x 24", 24" x 48", 48" x 48" panel sizes. Custom sizes are available upon request.
- Standard finish: White powder coat
 - Also Available in Black

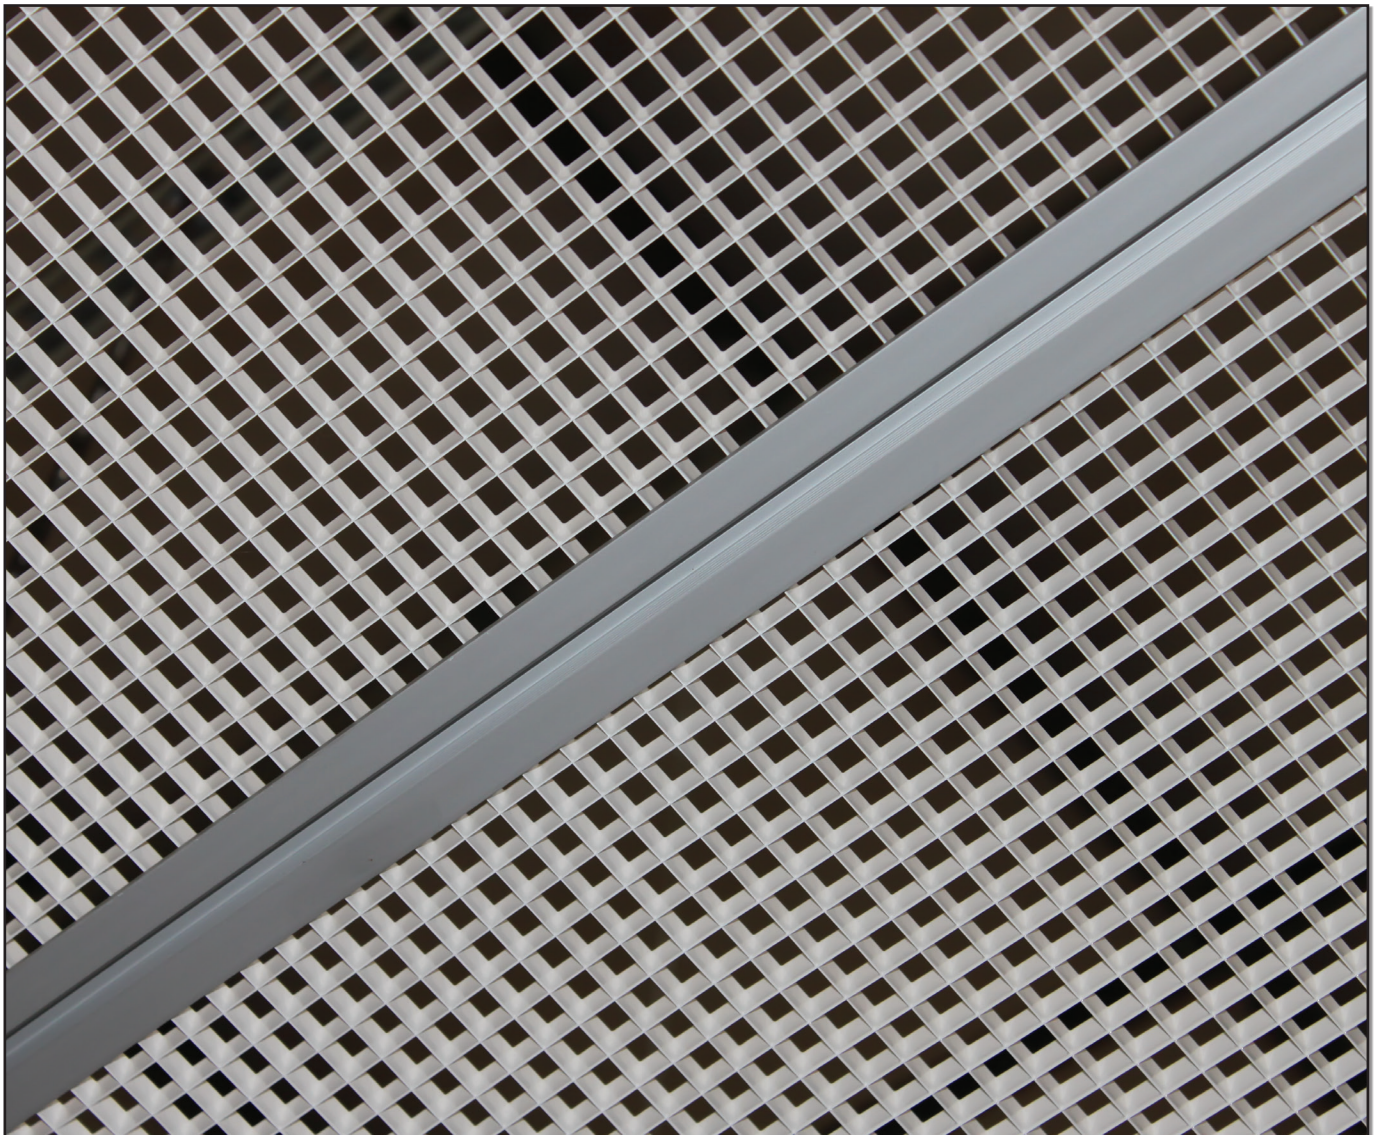

PANEL OPTIONS

GORDON
ARCHITECTURAL + ENGINEERED SOLUTIONS


DATA CENTER CEILING PANELS FOR DG GRIDS



Octave Acoustical Panels

Attributes:


- Material: Mineral wool tile, fleece-covered
- Colors: White (Standard) or Black (Special Order)
- Nominal 2' x 2' and 2' x 4' module sizes.....no field cutting required
- Thickness: 5/8"
- Sound Reduction: 33dB, CAC 35 dB, NRC 0.80

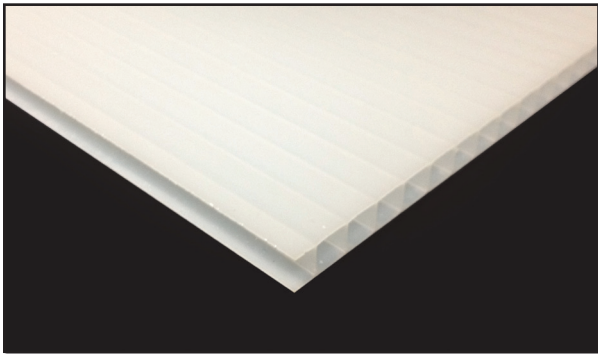

Twin Wall Polycarbonate Panels

Attributes:

- Perfect for luminous ceiling applications
- 10mm thickness
- Light reflectance = 33.9%
- Nominal 2' x 2', 2' x 4', 4' x 4' panel sizes.
- Standard colors: White or clear

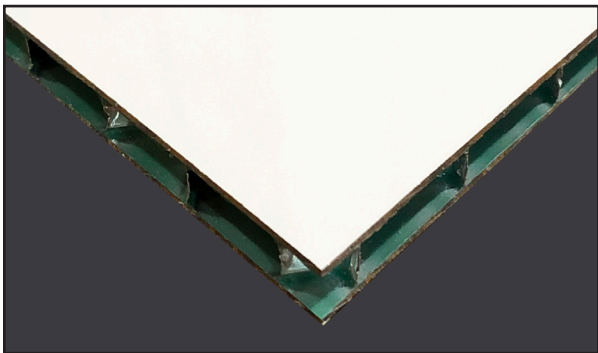

Honeycomb Core Panels

Attributes:

- 1/4" thickness
- Nominal 2' x 2', 2' x 4', 4' x 4' panel sizes.
- Top and Face plates: Aluminum alloy 5052-H32, .032" thick
- Standard finish: White epoxy

GORDON[®]
ARCHITECTURAL + ENGINEERED SOLUTIONS

5023 HAZEL JONES RD.
BOSSIER CITY, LA 71111
800.747.8954
GORDON-INC.COM
SALES@GORDON-INC.COM

