

CERTAINTEED TECHSTYLE® DG LAY-IN CEILINGS



WHITE

Surface Finish	Fiberglass Mat Acoustical Coating
Light Reflectance	81%(LR-1),(ASTM 1477)
Surface Burning	Class A (ASTM E 84) Flame Spread Index ≤ 10 Smoke Index ≤ 10

CERTAINTEED TECHSTYLE® DG LAY-IN CEILINGS




BLACK

Surface Finish	Polyester Non-Woven
Light Reflectance	N.A.
Surface Burning	Class A (ASTM E 84) Flame Spread Index ≤ 25 Smoke Index ≤ 50

PANEL SIZES (NOMINAL)

WIDTHS (FIXED)	LENGTHS
24"	24" / 48" / 60" / 72" / 96"
48"	48" / 60" / 72" / 96"

DG LAY-IN CEILING PANEL

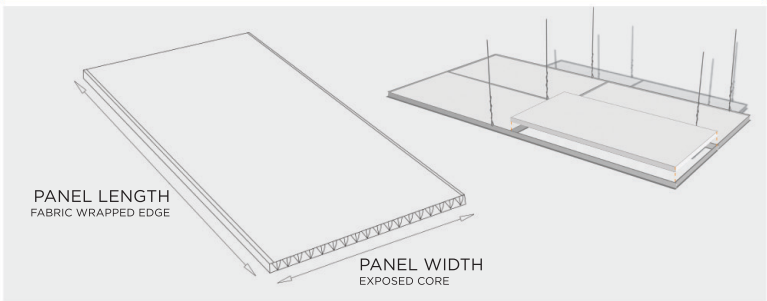

GENERAL SPECIFICATIONS

ACOUSTICAL RATINGS

NRC	0.85 (ASTM C 423)
CAC	17 W/No Backer (ASTM E 1414)

FIRE RATING

Class A (ASTM E 84)

ICC

Approval (ESR-2123)

MOISTURE RESISTANCE

Resistant to 95% humidity in 104 F

FUNGAL RESISTANCE

Resistant (ASTM C 1338)

WEIGHT

0.24 Pounds per Square Foot

WARRANTY

10 Year-Limited

CERTIFICATION




GREENGUARD GOLD Certified

The GREENGUARD INDOOR AIR QUALITY CERTIFIED Mark is a registered certification mark used under license through the GREENGUARD Environmental Institute.

GORDON INC. DATA CENTER GRIDS

DG 1.5



DG 3.0

