

FINAL FORMS II

UNIQUE TRIMS AND SHAPES IN PREFINISHED ALUMINUM

GORDON
INCORPORATED



BUY ONLINE >

INSTALLATION GUIDE

FINAL FORMS II features a tapered fin punched 8" O.C. for attachment to wall. Pre-applied to a wall, they offer concealed fastening of protective and decorative aluminum trim edging.

INSTALLATION INSTRUCTIONS

1. Install building paper behind/under all trims.
2. Attach trim 8" O.C. maximum with screws.
3. Install wire lath over nailing flange of trim.
4. On horizontal applications and vapor barrier applications install building paper over upper nailing flange of trim.
5. Apply sealant to all joints and along seams of factory fabricated intersections and corners. (For exterior vapor barrier applications, use optional splice clips with sealant for alignment when installing continuous lengths of Final Forms II R series.)
6. Clean plaster from exposed portions of trim immediately or use masking to protect trim during plastering. Plaster left to dry on the finished surface will stain the finish. Do not apply adhesive masking to pre-painted trims for longer than 24 hours. Release sheets are available for most trims for use in lieu of adhesive masking.
7. Trims can be cut with a chop saw using a fine tooth saw blade. Use a lubricant or a grease stick on the blade prior to cutting.

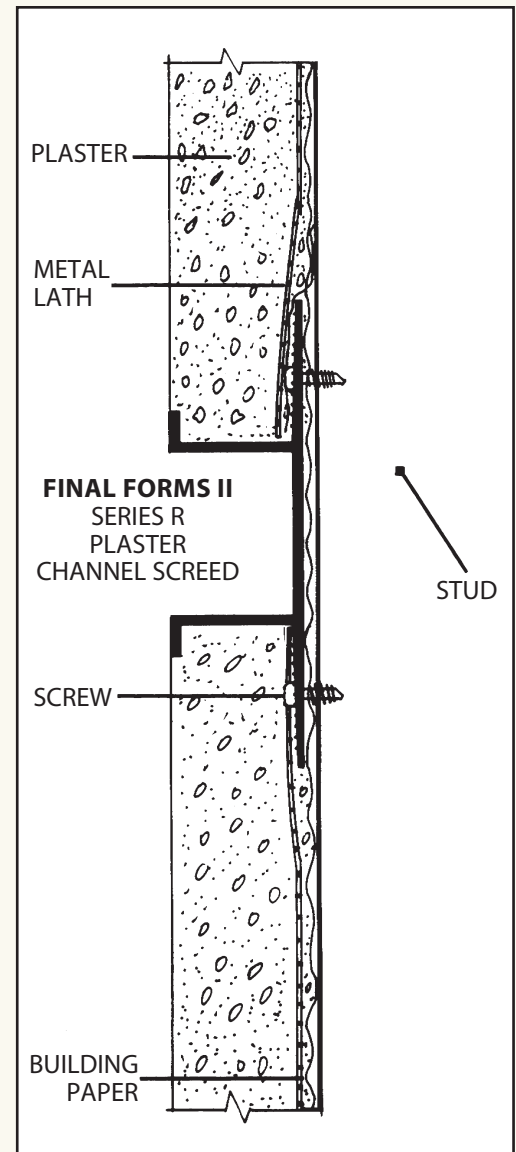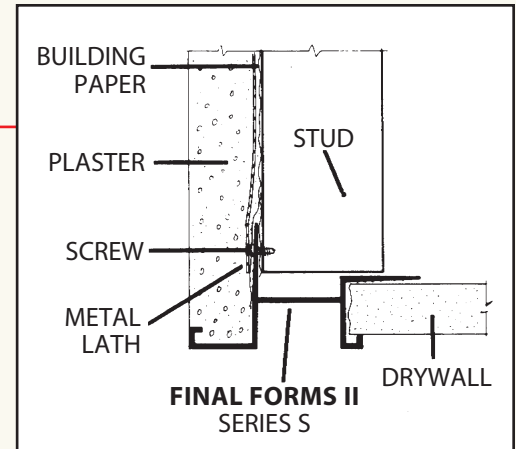


VENTING GUIDE

FINAL FORMS II PLASTER TRIMS



PART NUMBER	SLOT ROWS	Approx. % Open Area/LF	Open Area Sq. In./LF
FD 1212	1	22	1.25
FD 1234	1	14	1.25
FD 1210	2	21	2.5
FD 5812	1	22	1.25
FD 5834	1	14	1.25
FD 5810	2	21	2.5
FD 5815	3	21	3.75
FD 5830	6	21	7.5
FP 3412	1	22	1.25
FP 3434	1	14	1.25
FP 3410	2	21	2.5
FP 3415	3	21	3.75
FP 1034	1	14	1.25
FS 1034	1	14	1.25
JD 5834	1	14	1.25
JP 3434	1	14	1.25
JP 34118	2	21	2.5
JP 34150	3	21	3.75
PR 3412	1	22	1.25
PR 3434	1	14	1.25
PR 3410	2	21	2.5
RD 1212	1	22	1.25
RD 1234	1	14	1.25
RD 1210	2	21	2.5
RD 1215	3	21	3.75
RD 1220	4	21	5
RD 1230	6	21	7.5
RD 1240	8	21	9.9
RD 5812	1	22	1.25
RD 5834	1	14	1.25
RD 5810	2	21	2.50
RD 5815	3	21	3.75
RD 5820	4	21	5
RD 5830	6	21	7.5
RD 5840	8	21	9.9
RH 1415	3	21	3.75
RH 1430	6	21	7.5
RH 3812	1	22	1.25
RP 3434	1	14	1.25
RP 3410	2	21	2.5
RP 3412	1	22	1.25

FACTORY VENTING
AVAILABLE
(SLOTS 5/32" X 1")

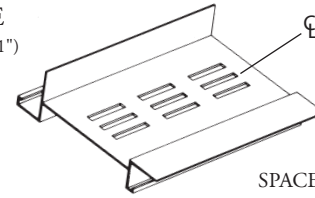

SPACED 1-1/2" O.C.
LENGTHWISE...ROWS
VARY WITH PROFILE

PART NUMBER	SLOTS	Approx. % Open Area/LF	Open Area Sq. In./LF
RP 3415	3	21	3.75
RP 3420	4	21	5
RP 3425	5	21	6.2
RP 3430	6	21	7.5
RP 3440	8	21	9.9
RP 3460	8	17	12.5
RS 1010	2	21	2.5
RS 1030	6	21	7.5
RS 12520	4	21	5
RS 12530	6	21	7.5
RS 12560	8	17	12.5
SD 5834	1	14	1.25
SD 5810	2	21	2.5
SD 5820	4	21	5
SD 5830	6	21	7.5
SP 3434	1	14	1.25
SP 3434NL	1	14	1.25
SP 3410	2	21	2.5
SP 3420	4	21	5
SP 3430	6	21	7.5
VS 3430	6	21	7.5
WD 1212	1	22	1.25
WD 1234	1	14	1.25
WD 5834	1	14	1.25
WD 5830	6	21	7.5
WD 3434	1	14	1.25
WS 1010	2	21	2.5
WP 3434	1	14	1.25
WP 3410	2	21	2.5
WP 3420	4	21	5
WP 3430	6	21	7.5
WP 3435	5	15	6.2
WP 3440	7	18	8.7

